

# SKDW SERIES

30W-40W WIDE INPUT RANGE

SCHMID-M

## FEATURES

- 30-40W DIL PACKAGE
- SIX-SIDE SHIELDED CASE
- INDUSTRY STANDARD PACKAGE
- 9-18V,18-36V,36-72V WIDE INPUT RANGE
- 100% BURNED IN
- HIGH EFFICIENCY
- RoHS COMPLIANT
- 3 YEARS PRODUCT WARRANTY



OUTPUT SPECIFICATIONS		INPUT SPECIFICATIONS	
Voltage Setpoint Accuracy	+/-2% max	Input Voltage Range	2:1 INPUT RANGE
Temperature Coefficient	+/-0.03%/°C	Input Filter	Pi Network
Ripple & Noise(20MHz BW) <sup>1</sup>	100mVp-p max	<b>GENERAL SPECIFICATIONS</b>	
Line Regulation <sup>2</sup>	+/-0.5% max		
Load Regulation <sup>3</sup>	+/-0.5% max	Efficiency	80% min
Minimum load	10% of Full Load	Isolation Voltage <sup>4</sup>	1500 VDC min
Short Circuit Protection	Continuous	Isolation Resistance	10 <sup>9</sup> ohms min
OverVoltage Protection	Built-in	Isolation Capacitance	1200pF max
External Trim Adj. Range	+/-10%	Switching Frequency	100 KHz min
<b>ENVIRONMENTAL SPECIFICATIONS</b>		MTBF <sup>5</sup>	>700,000 Hours
		Weight	110g Typ
Operating Temperature	-40 °C to +71 °C	Case Material	Six-Side Shielded Case
Storage Temperature	-55 °C to +100 °C	Case Size	50.8mm*50.8mm*21mm
Cooling	Free-Air Convection	Potting Material	Epoxy(UL94-V0)
		Conducted Emissions	EN55022 Class A
		Radiated Emissions	EN55022 Class A

ALL SPECIFICATIONS TYPICAL AT NOMINAL LINE, FULL LOAD, AND 25 °C UNLESS OTHERWISE NOTED.

<sup>1</sup> Measured with 1uF ceramic capacitor connect to the output pins.

<sup>2</sup> High Line to Low Line.

<sup>3</sup> Load Regulation is for output load current change from 10% to 100%.

<sup>4</sup> For 10 seconds.

<sup>5</sup> MIL-HDBK-217F @25 °C, Ground Benign.

● **SELECTION GUIDE**  
**2:1 30W~40W OUTPUT**


MODEL NUMBER	INPUT VOLTAGE (VDC)	OUTPUT VOLTAGE (VDC)	OUTPUT CURRENT (mA)	INPUT <sup>6</sup>		EFF (%) <sup>7</sup>	ISOLATION (VDC)
				CURRENT(mA)			
				FULL LOAD	NO LOAD		
SKDWS-1212	9-18	12	3000	3650	40	82	1500
SKDWS-1224	9-18	24	1500	3640	40	82	1500
SKDWS-1230	9-18	30	1200	3645	40	82	1500
SKDWS-2412	18-36	12	3000	1820	18	82	1500
SKDWS-2415	18-36	15	2400	1810	18	83	1500
SKDWS-2424	18-36	24	1667	1950	18	85	1500
SKDWD-2412	18-36	+/-12	+/-1650	1960	18	85	1500
SKDWD-2415	18-36	+/-15	+/-1300	1960	18	83	1500
SKDWS-4812	36-72	12	3000	910	9	82	1500
SKDWS-4815	36-72	15	2400	902	9	83	1500
SKDWS-4824	36-72	24	1667	976	9	85	1500
SKDWD-4812	36-72	+/-12	+/-1650	980	9	85	1500
SKDWD-4815	36-72	+/-15	+/-1300	980	9	83	1500

**Note: Other input to output voltages may be available. Please contact factory.**


<sup>6</sup> **NOMINAL INPUT VOLTAGE.**

<sup>7</sup> **NOMINAL INPUT VOLTAGE, FULL LOAD.**

## ● SIMPLIFIED SCHEMATIC

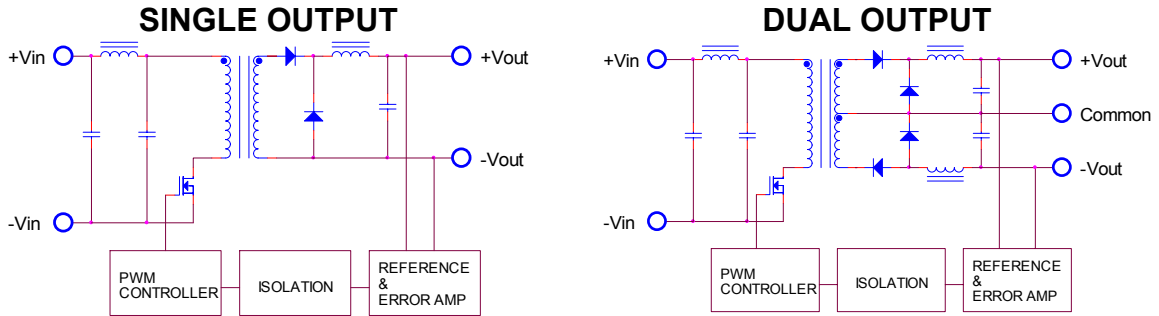

## ● MECHANICAL DIMENSIONS

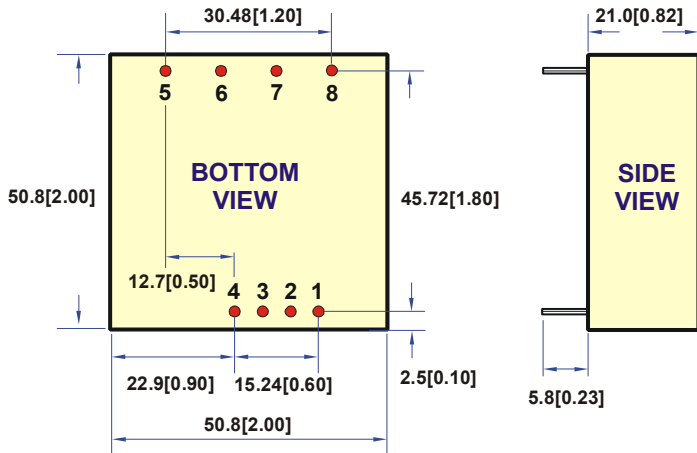


All dimensions are in millimeters[inches]

PIN	SINGLE	DUAL
1	Remote On/Off	
2	NO PIN	
3	-Vin	-Vin
4	+Vin	+Vin
5	NC	+Vout
6	+Vout	Common
7	-Vout	-Vout
8	TRIM	TRIM

Remote On/Off Control			
Control Input	PIN1	Control Common	PIN3
Control Voltage		Converter Shutdown Idle Current	10mA
ON	>+2.5VDC or Open Circuit	Logic Compatibility	CMOS or Open
OFF	<+0.8VDC or Jumper to PIN3		Collector TTL

## ● RECOMMENDED FOOTPRINT DETAILS


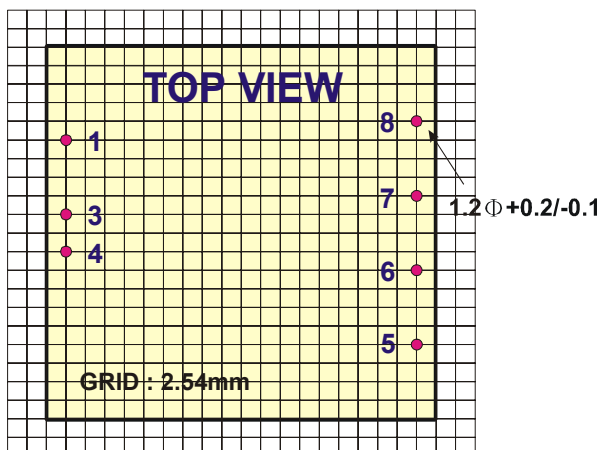


## ● TYPICAL APPLICATIONS



### SINGLE OUTPUT

### DUAL OUTPUT



#### FIXED VOLTAGE OUTPUT

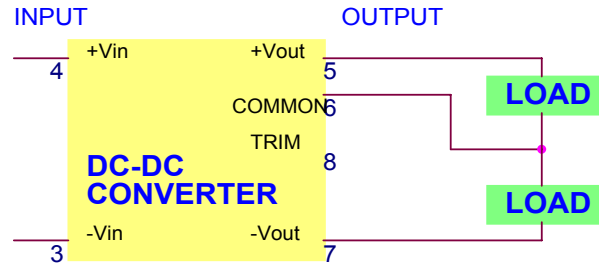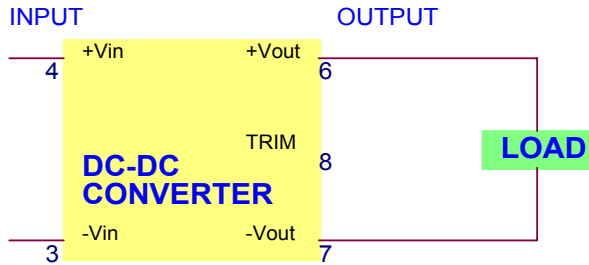



#### TRIM CONNECTIONS USING A TRIMPOT

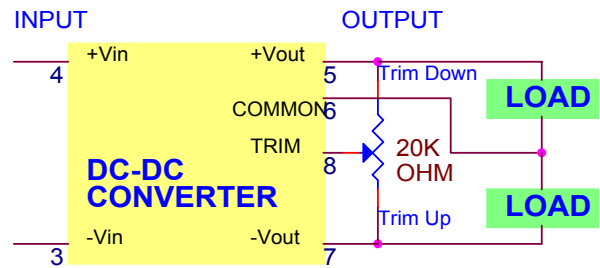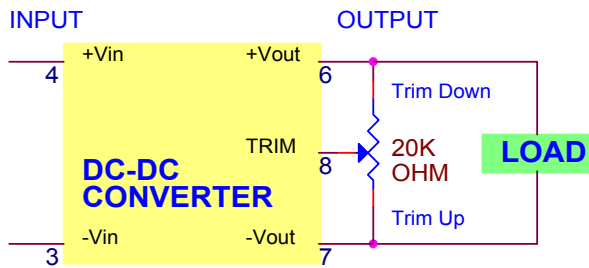

#### FIXED-VALUE TRIM DOWN RESISTOR

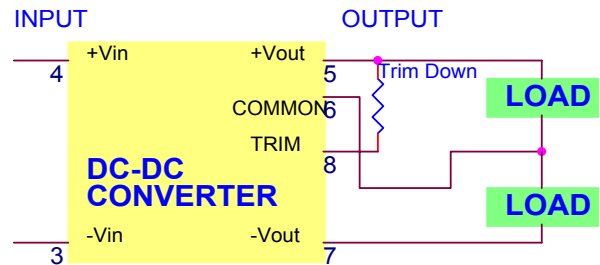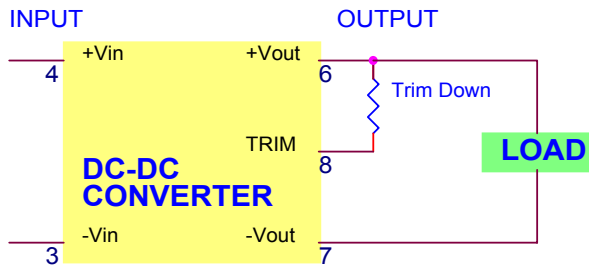


#### FIXED-VALUE TRIM UP RESISTOR

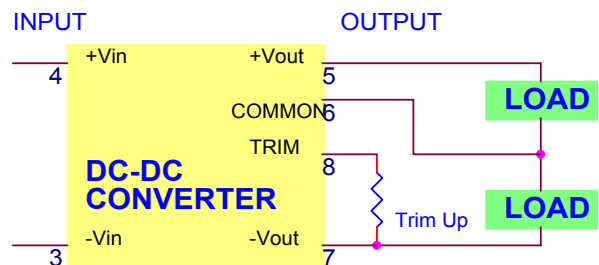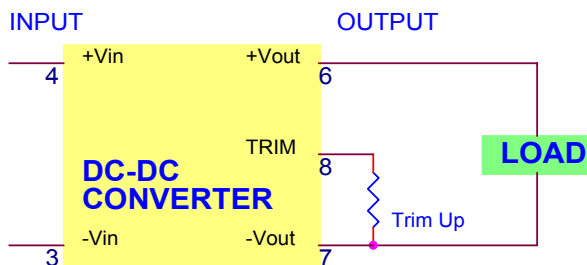


## ● TYPICAL PERFORMANCE CURVES

Specifications typical at  $T_a=25^\circ\text{C}$ , nominal input voltage, rated output current unless otherwise specified.

### OUTPUT LOAD VS EFFICIENCY

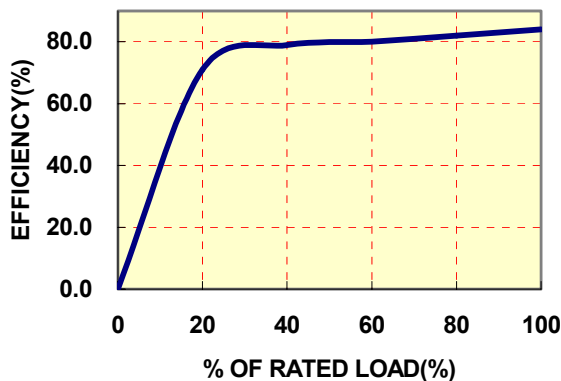

### TEMPERATURE DERATING

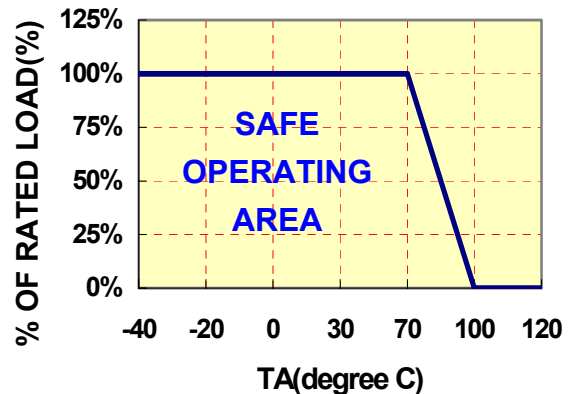

### SKDW SERIES APPLICATION NOTES:

#### EXTERNAL CAPACITANCE REQUIREMENTS:

No external capacitance is required for operation of the SKDW Series

To meet the reflected ripple requirements of the converter, an input impedance of less than 0.5 ohm from DC to 220KHz is required.

External output capacitance is not required for operation, however it is recommended that 10uF tantalum and 0.1uF ceramic capacitance be selected for reduced system noise.

Additional output capacitance may be added for increased filtering, but should not exceed 2200uF.

We Can Offer EMC-Filter According To EN55011/22 Class B

#### Negative Outputs:

A negative output voltage may be obtained by connecting the +OUT to circuit ground and connecting -OUT as the negative output.

#### Remote ON/OFF:

The remote ON/OFF pin may be left floating if this function is not use. It is recommended to drive this pin with an open collector arrangement or a relay contact. When the ON/OFF pin is pulled low with respect to the  $-V_{in}$ , the converter is placed in a low power drain state.

#### Output TRIM:

The TRIM pin may be used to adjust the output +/-10% from the nominal setting .this function allows adjustment for voltage drops in the system wiring. If the TRIM function is not required the pin may be left floating.